


# Ingersoll-Rand®

## Oilless Reciprocating Air Compressors

These days, many industries require oil-free compressed air in a durable, high quality package. Ingersoll-Rand meets these demands with a family of oilless reciprocating air compressors. And oilless means you won't find one drop of oil in the entire crankcase. Outstanding cooling and precision fit mean that our components provide trouble free performance in demanding conditions even when 24-hour continuous duty is required. Our proven service schedule, with periods of extended maintenance intervals, virtually eliminates downtime.

To get the best in reliable, oil-free compressed air, it pays to go oilless with Ingersoll-Rand.

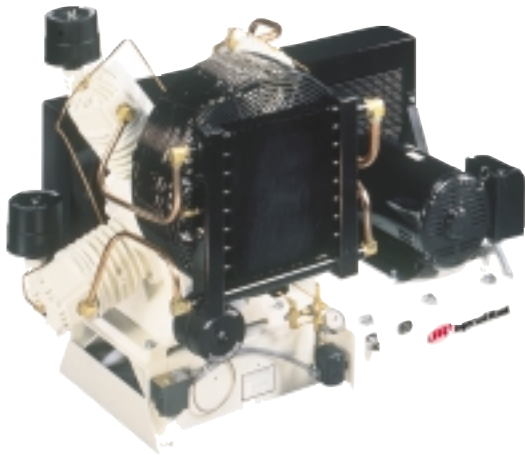

- 100% oilless design. No lubrication required.
- High efficiency in a low maintenance package
- 24-hour continuous duty design
- V belt drive with totally enclosed belt guard and belt tension adjuster
- Dual control regulation
- Single and two-stage reciprocating design available
- Mounted air-cooled aftercooler with motor driven cooling fan
- NEMA 1 mounted and wired full voltage magnetic across the line starter with:
  - Thermal overload relays
  - On/off switch
  - Hour meter in cover
  - 120 volt control voltage transformer
  - UL and CSA approved
- NEMA 1 mounted and wired combination alternator included on duplex packages
- Automatic drain valve
- ASME receiver tank
- Compressor pump NFPA-99 compliant. NFPA-99 compressor package option available.



LEGENDARY  
PERFORMANCE

 **Ingersoll-Rand®**

# Technical Specification Guide

## Standard Features Oilless Reciprocating

### Stainless steel valves

Designed for long life and minimum maintenance.

### Teflon rings and rider bands


Self-lubricating: no oil needed.

### Thermal insulator

Prevents heat of compression from transmitting to piston pin bearings.

### Single-piece connecting rod

Long lasting, no-maintenance design.

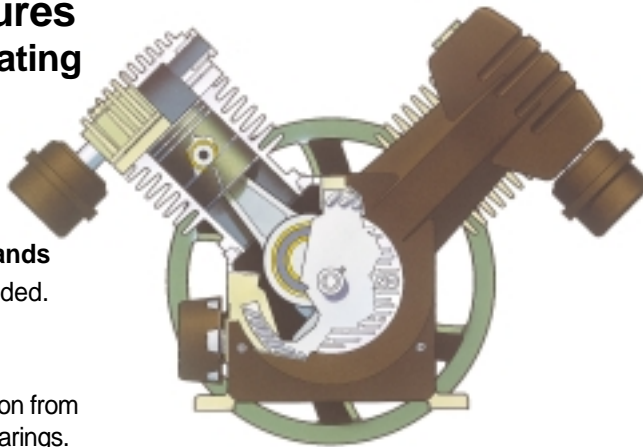

### Ball and needle bearings

Grease-filled and sealed to maintain optimum system performance.

### Precision-fit components

Accurately machined cylinders with coated bores and cast-iron frame offers proven reliability, durability and extended ring life and maintenance intervals.

### Superior cooling systems

Unique cooling design dissipates heat, enabling 24-hour a day, 125 psig, continuous duty operation.

### Balanced one-piece crankshaft

Reduces noise and vibration.

## Specifications

Model	Motor	Cylinder	ASME Receiver Size	Capacity acfm @100 psig	Maximum Pressure PSIG	Package Dimensions LxWxH (in.)	Net Weight (lbs.)
OL5X5	5	2	N/A	17.5	125	42x26x25	350
OL5D5	5	2	80 (Horz)	17.5	125	68x26x45	600
2-OL5E5	5	2	120 (Horz)	35.0	125	72x52x54	1,250
OL5X7.5	7.5	2	N/A	21.7	125	42x26x25	375
OL5D7.5	7.5	2	80 (Horz)	21.7	125	68x26x45	625
2-OL5E7.5	7.5	2	120 (Horz)	43.4	125	72x52x54	1,300
OL10X10	10	3	N/A	32.0	125	51x33x28	550
OL10D10	10	3	80 (Horz)	32.0	125	68x28x48	700
OL10E10	10	3	120 (Horz)	32.0	125	72x28x50	850
2-OL10E10	10	3	120 (Horz)	64.0	125	72x54x58	1,600
2-OL10A10	10	3	240 (Horz)	64.0	125	90x54x63	2,000
OL15X15	15	2	N/A	49.0	125	49x32x37	800
OL15E15	15	2	120 (Horz)	49.0	125	75x32x63	1,150
OL15A15	15	2	240 (Horz)	49.0	125	92x32x68	1,400
2-OL15A15	15	2	240 (Horz)	98.0	125	95x55x72	2,500
OL25X25	25	4	N/A	93.0	125	62x40x44	1350



**MORE THAN AIR.  
SOLUTIONS.**

Online solutions: [www.irco.com](http://www.irco.com)



Ingersoll-Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll-Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll-Rand's standard terms and conditions of sale for such products, which are available upon request.



Ingersoll-Rand Company  
Commercial and Retail Air Solutions  
Davidson, NC 28036